

SBOX-2623-R2312

AMD Ryzen™ Embedded R2312 w/ 1x DVI-D / 2x HDMI® / 2x GbE / 4x COM / DC 9-36V Embedded Computer



- AMD Ryzen™ Embedded R2312 2C/4T Processor
- Dual HDMI® Supports Resolution Specified in HDMI 2.0b
- 1 x M.2 2280 Key M Supports NVMe or SATA SSD
- 1 x M.2 3042/52 Key B Supports USB 3.2 WWAN with Dual SIM
- 1 x M.2 2230 Key E Supports PCIe and USB2.0 Wi-Fi/Bluetooth

Specifications

System

Processor

- AMD Ryzen™ Embedded R2312 2C/4T Processor

Graphics

- CPU Built-in Graphics AMD Radeon™ Graphics

Memory

- 1 x SO-DIMM DDR4-2400 up to 32GB (ECC Support with ECC DRAM)

Security

- TPM 2.0

Watchdog

- System power on/off 1 ~ 255 min setting by BIOS

Interface

Video

- 1 x DVI-D (Single link with custom pin define)
- 2 x HDMI® supports 4K@60Hz as specified in HDMI 2.0b

Audio

- 1 x Line-out and 1 x Mic-in

Ethernet

- 2 x I210-AT GbE RJ45 port

USB

- 2 x USB 3.2 Gen 2 (10Gbps)
- 2 x USB 2.0

GPIO

- 1 x GPIO port supporting 4 x GPI and 4 x GPO (5VDC TTL)

Serial Port

- 4 x RS-232/422/485

Internal Expansion

M.2

- 1 x M.2 3042/52 Key B supports USB 3.2 WWAN w/ Dual SIM
- 1 x M.2 2230 Key E supports PCIe and USB2.0 Wi-Fi/BT

mPCIe

- 1 x mPCIe full size slot supports USB 2.0 only

Storage

Type

- 1 x M.2 2280 Key M supports NVMe or SATA SSD
- 1 x 2.5" SATA SSD

Power

Power Input

- DC 9 ~ 36V via 2 pins terminal block

Power Protection

- Over voltage and reverse polarity protection

Software

Operating System Support

- Windows 10 IoT Enterprise 64bit LTSC
- Windows 11 IoT Enterprise LTSC
- Ubuntu 20.04 LTS 64bit

Environmental

Operating Temp.

- -30 ~ 60°C, with SSD, ambient w/ air flow 0.6m/s (for barebone system)

Storage Temp.

- -40 ~ 85°C

Relative Humidity

- 10% RH ~ 90% RH (non-condensing)

Certification / Standard

- CE, FCC Class A, UKCA

Mechanical

Construction

- Aluminum Alloy

Mounting Method

- Wall-mounting


Weight

- 1.7kg

Dimensions

- 210 (L) x 171 (W) x 50 (H) mm

Dimensions

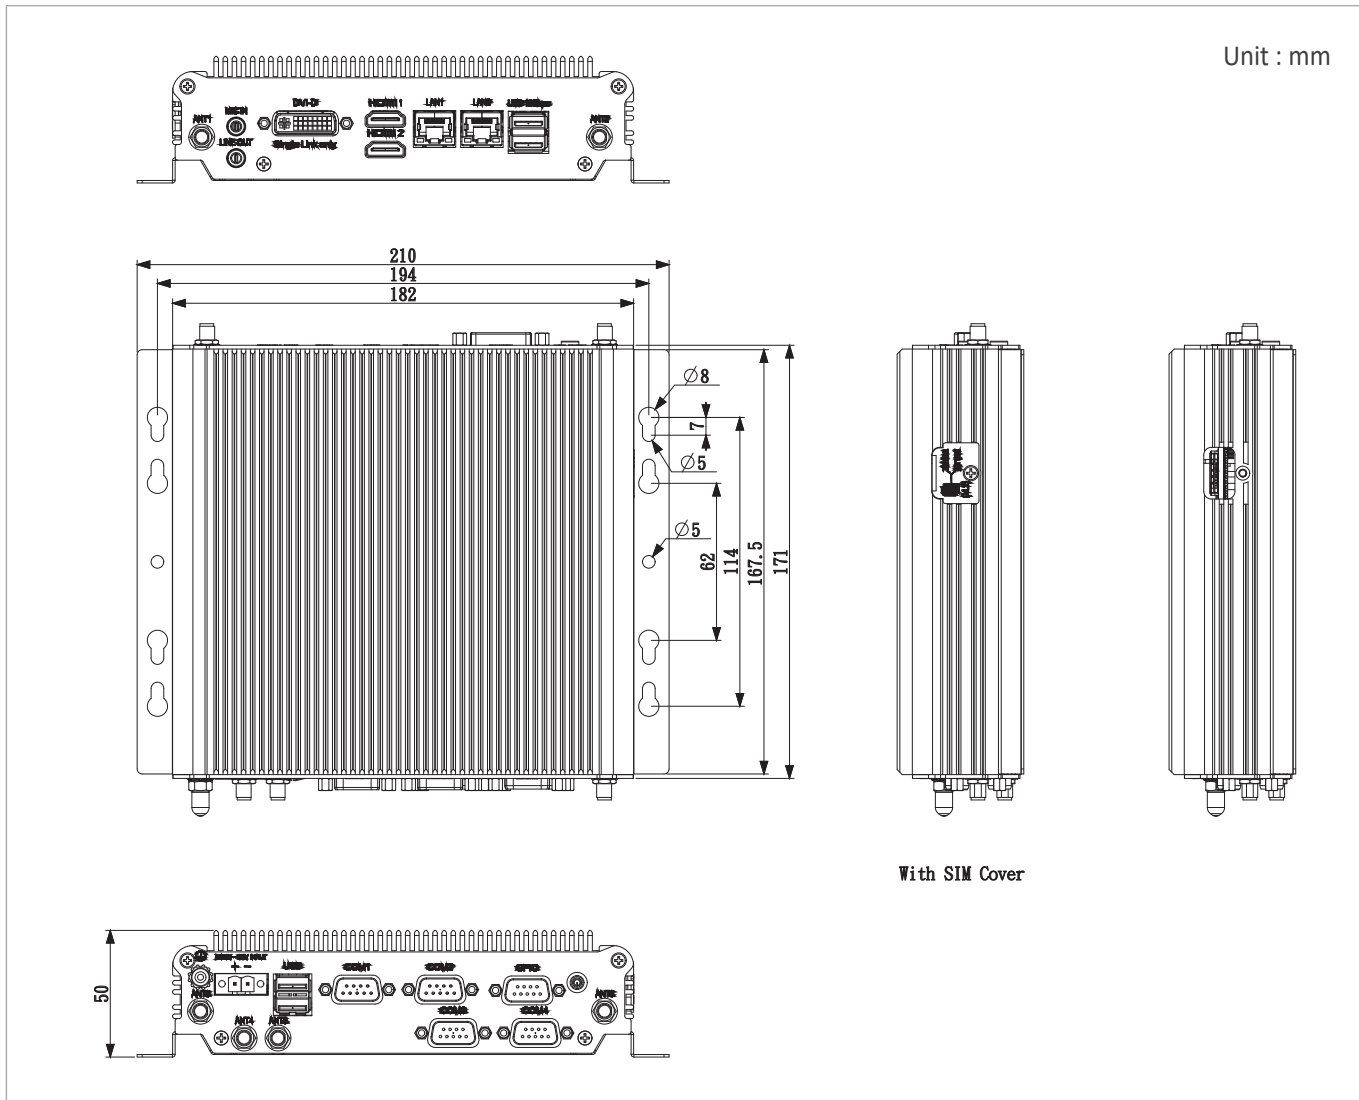

Ordering Information

Model Number	SBOX-2623-R2312
Description	AMD Ryzen™ Embedded R2312 w/ 1x DVI-D / 2x HDMI® / 2x GbE / 4x COM / DC 9-36V Embedded Computer
State of Origin	Made in Taiwan

Optional Accessories

Memory	DDR4-2400/2666/3200 SO-DIMM, 8GB~32GB, -40~85°C (ECC Option Available)
SSD	M.2 2280 Key B-M NVMe TLC -40~85°C 512GB~2TB
SSD	M.2 2280 Key B-M SATA TLC -40~85°C 128GB~2TB
SSD	2.5 inch SATA TLC -40~85°C 128GB~2TB
Wi-Fi	M.2 2230 Key E 802.11 a/b/g/n/ac, Wi-Fi 6E
WWAN	M.2 3042 Key B LTE (USB) / 3052 Key B 5G (USB) with Thermal Kit
CAN Bus	mPCIe full size (USB interface only)

All specifications are subject to change without notice.